


sectional view

elevation

**Chamfered window surround with label mould**

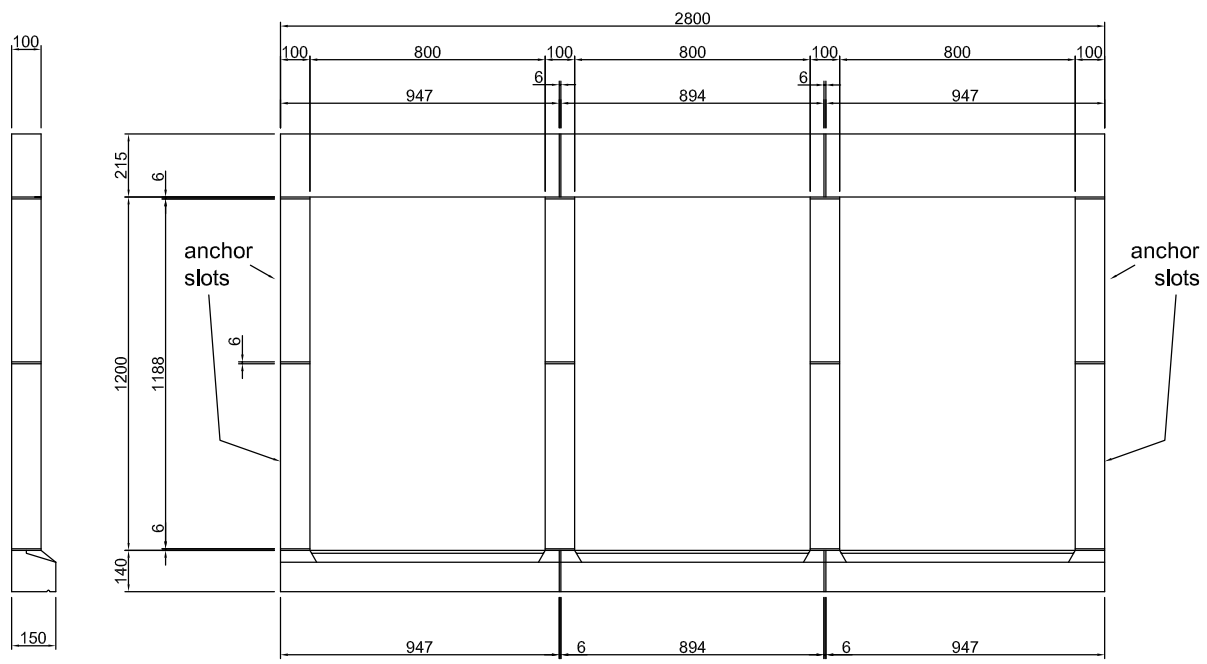

sectional view

elevation

**Plain section window surround**

TYPICAL MULLION / JAMB SECTIONS:

- 100MM X 150MM - IN BRICKWORK
- 100MM X 100MM - IN BRICKWORK
- 120MM X 120MM - IN RENDER
- 120MM X 170MM - IN RENDER

MULLIONS MAY BE SUPPLIED IN SECTION TO SUIT SLENDERNESS RATIO.

ALL NON-STANDARD DIMENSIONS MANUFACTURED TO ORDER

USE STAINLESS STEEL DOWELS TO LOCATE COMPONENTS

IMPORTANT NOTICE: SEMI-DRY CAST LINTELS ARE NON LOAD BEARING AND SHOULD BE USED IN CONJUNCTION WITH A SUITABLE STRUCTURAL LINTEL AS PER ENGINEER OR MANUFACTURERS RECOMMENDATIONS

NOTE:

SURROUNDS COMPRISE OF CILLS, HEADS, MULLIONS AND JAMBS AS PER REQUIREMENTS

JAMBS MANUFACTURED COMPLETE WITH ABBEY SLOTS TO SECURE BACK TO ADJOINING BRICKWORK WITH STANDARD FISHTAIL TIES

HEADS AND CILLS ON 2 LIGHT (AND ABOVE) WINDOW SURROUND SUPPLIED SPLIT AT MULLIONS

OPENING SIZES AVAILABLE (DIM A): 488MM, 630MM, 915MM, 1200MM, 1770MM

ALL NON-STANDARD COMPONENTS MANUFACTURED TO ORDER.